

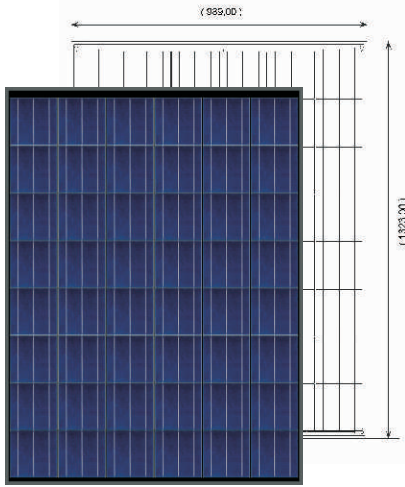


PVQ3 - Black

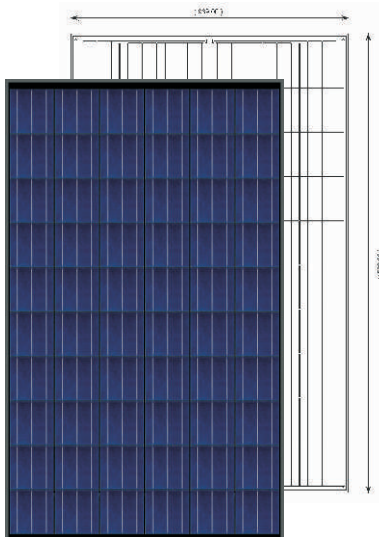

| Model Name | PVQ3/B 175 | PVQ3/B 180 |
|-----------------------------|-----------------------------------|------------------|
| Number of cells | 48 cells in a series | |
| Maximum Power (-0/+3%) (Wp) | 175W | 180W |
| Open circuit voltage (Voc) | 30.10 V | 30.40 V |
| Short circuit current (Isc) | 7.80 A | 8.00 A |
| Maximum power voltage (Vmp) | 23.84 V | 24.00 V |
| Maximum power current (Imp) | 7.35 A | 7.50 A |
| Cell Efficiencies | 15.40% and above | 15.80% and above |
| Dimensions | 1323mm (L) x 989mm (B) x 35mm (H) | |
| Weight | 16.5 Kgs | |
| Module Efficiencies | 13.4% | 13.8% |


| Model Name | PVQ3/B 200 | PVQ3/B 205 |
|-----------------------------|-----------------------------------|------------------|
| Number of cells | 54 cells in a series | |
| Maximum Power (-0/+3%) (Wp) | 200W | 205W |
| Open circuit voltage (Voc) | 35.10 V | 36.50 V |
| Short circuit current (Isc) | 7.80 A | 7.60 A |
| Maximum power voltage (Vmp) | 27.15 V | 28.97 V |
| Maximum power current (Imp) | 7.37 A | 7.08 A |
| Cell Efficiencies | 15.60% and above | 16.00% and above |
| Dimensions | 1481mm (L) x 989mm (B) x 35mm (H) | |
| Weight | 18 Kgs | |
| Module Efficiencies | 13.7% | 14.0% |

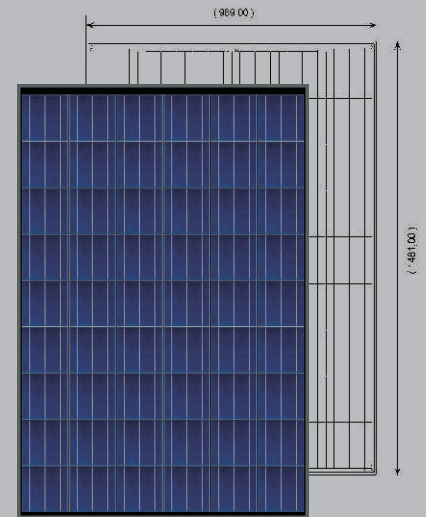

| Model Name | PVQ3/B 220 | PVQ3/B 225 |
|-----------------------------|-----------------------------------|------------------|
| Number of cells | 60 cells in a series | |
| Maximum Power (-0/+3%) (Wp) | 220 W | 225 W |
| Open circuit voltage (Voc) | 37.29 V | 37.46 V |
| Short circuit current (Isc) | 8.00 A | 8.06 A |
| Maximum power voltage (Vmp) | 29.70 V | 30.01 V |
| Maximum power current (Imp) | 7.41 A | 7.50 A |
| Cell Efficiencies | 15.40% and above | 15.80% and above |
| Dimensions | 1639mm (L) x 989mm (B) x 35mm (H) | |
| Weight | 20 Kgs | |
| Module Efficiencies | 13.6% | 13.9% |


Operating Characteristics

| | |
|------------------------------------|-----------|
| Normal Operating cell temp. (NOCT) | 45.5 C |
| Temperature Coefficient (Pmax) | -0.45%/°C |
| Temperature Coefficient (Voc) | -0.35%/°C |
| Temperature Coefficient (Isc) | 0.079%/°C |
| Maximum system voltage | DC 1000 V |

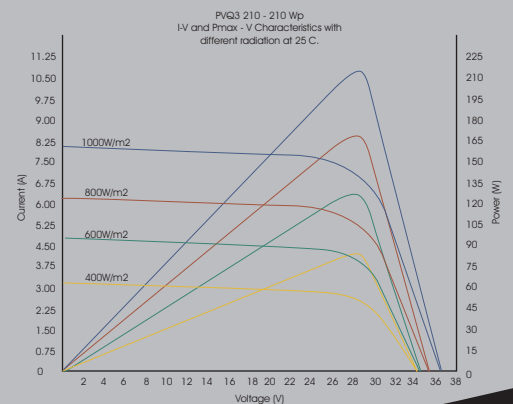

PVQ3 - Black

Module Construction

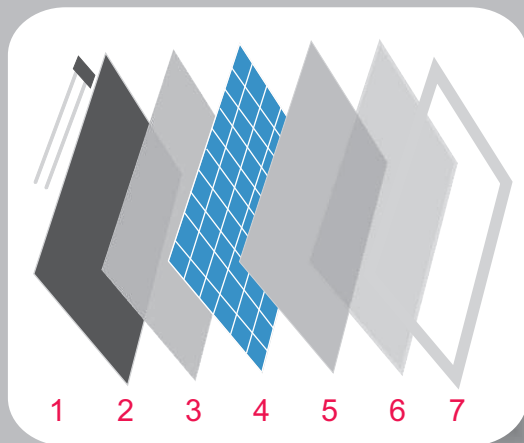

1. PV Junction Box : IP65 compliant junction box with 6 high quality diodes. MC4 compatible connectors ensure a safe and a secure connection.

2. Backsheet : Improves weather resistance and increases light reflection, high quality backsheet in Black color.

3. EVA (Ethylene Vinyl Acetate) : Creates a tight seal and renders the cells its long life.

4. Cells : Premium grade high efficiency polycrystalline next generation 3 bus bar cells from Q Cells, Germany.

5. EVA (Ethylene Vinyl Acetate)

6. Glass : 3.20mm Low Iron Toughened, High Transitivity, Tempered High Impact resistance glass - Textured on the inside to increase reflection and efficiency.

7. Aluminum Frames : Robust, Anodized Non-corroding aluminum snap-fit frames with pre-drilled drainage and grounding holes. Powder coated with black color.

High Efficiency cells :

The PVQ3 - Black series is based on premium next generation three bus bar polycrystalline cells from Q Cells, Germany. These cells have lower series resistance; higher fill factor and higher efficiencies.

Aesthetically appealing High Efficiency Modules :

The PVQ3 - Black series has a unique design that integrates dark colored cells with a black back sheet and black frames to render an aesthetically appealing uniform black color to the modules. The modules are constructed to maximize the space available to increase the efficiency of the module. The PVQ3 series of modules have a minimum efficiency of 12.50% and go all the way to 14.00%.



PV Power Tech's Quality and Product commitment :

At PV Power Tech, we take pride in using the best quality proven raw materials from industry leaders. The modules are constructed using state of the art automated equipments in our TUV certified manufacturing facility. The PVQ3 - black series is being tested by TUV Intercert according to the standards of IEC 61215 for design and performance and IEC 61730 (Safety Class II). The modules are backed by a standard 3 years manufacturing warranty and power warranties of 90% of the minimum output power for 10 years and 80% of the minimum output power for 25 years.

Application :

The PVQ3 - Black series is available as both framed and laminates for a wide variety of applications from roof top installations to roof integrated installations.

Note:

1. PV Power Tech reserves the right to change the specification without prior notice.
2. All measurements and warranty/guarantee applicability under standard test conditions (1000W/m², 25°C, AM 1.5)



PV POWER TECH

www.pvpowertech.com

Unit GJ 14, SDF VII, SEEPZ SEZ,
Andheri East, Mumbai 400 096. India.
Phone +91 (22) 4221 4800. • Fax +91 (22) 4221 4801.
• Email info@pvpowertech.com • Web www.pvpowertech.com